


Aquaduct

Delivery Pipeline

- Fast deployment and retrieval
- Easy storage and transport
- No corrosion
- High resistance to abrasion on rough terrain

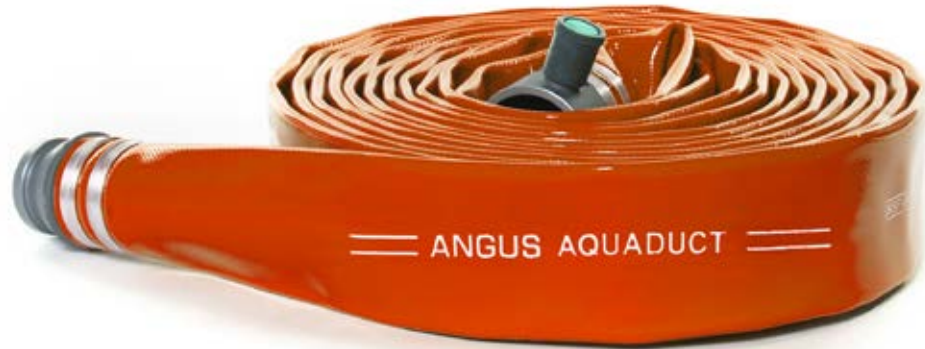

A flexible layflat pipeline for all water delivery operations, offering major cost savings and performance advantages over conventional rigid pipe.

Fast Deployment & Retrieval

Long continuous lengths can be quickly deployed and retrieved using a wide variety of systems including light duty trailers, flaking boxes, and power-driven reels. High flexibility and kink resistance allows natural ground contours to be followed without putting stress on the pipeline and eliminates expensive pathcutting work. Fewer joints and faster connections mean reduced labour and equipment costs. Rapid restoration of water supplies in an emergency for good public relations.

Easy to Store and Transport

Lightweight and compact for economical storage. Standard pick-up truck instead of flat-bed truck and fork lift reduces transport costs and enables direct routes inaccessible to larger vehicles to be taken.

Long Service Life

Designed for long life and maintenance-free service in even the harshest environments. Tough and durable with exceptional resistance to abrasion and cutting for use on a wide variety of ground conditions. No corrosion or scaling. Resistant to fuels, chemicals, UV, ozone, weathering, hydrolysis, and microbiological attack.

Low Operating Costs

Low pressure loss for efficient pumping. Swells up to 10% above uncharged diameter at maximum operating pressure enabling more water to be pumped.

Features a unique "through-the-weave" one piece construction comprising a circular woven high tenacity polyester reinforcement totally encapsulated in a tough elastomeric polyurethane cover and lining.

Manufactured in compliance with BS EN ISO 9001:2008 quality management systems. Raw materials, components, and finished products are rigorously tested and inspected to ensure excellent product reliability.

Manufacturing facility operates an Environmental Management System which meets ISO 14001:2004.

Wide range of couplings, manifolds, and hardware available for connecting the pipeline to additional segments, fluid supplies, or auxiliary hardware.

Typical Applications

■ Municipal

Emergency Water Supply
Pipeline By-pass
Waste Transfer
Sewer and water treatment
Municipal Fire Services

■ Industrial

High Flow De-Watering
Liquid and Powder Foodstuffs
Slurry Pumping
Loading/Unloading from Truck
Industrial Fire Services



Aquaduct

Delivery Pipeline

Nominal Technical Specification			
Diameter	inch	4	6
	mm	102	152
Standard colour****		Orange	Orange
Wall thickness	mm	2.7	3.3
Standard supply length***	m	200	200
Weight*	kg/m	0.97	1.7
Minimum short length burst pressure	bar	42	42
Maximum working pressure**	bar	21	21
Operational temperature range	°C	-50 to +70 depending on application	

* Excluding couplings

** Or maximum working pressure of attached coupling, whichever is the lower

*** Longer lengths available on request

**** Also available in black or blue, subject to volume

INTERNATIONAL SALES

Angus Flexible Pipelines

Station Road, Bentham, Lancaster, LA2 7NA, UK
Tel: +44 (0)1524 264000

Angus Flexible Pipelines operates a continuous programme of product development. The right is therefore reserved to modify any specification without prior notice and Angus Fire should be contacted to ensure that the current issues of all technical data sheets are used.

© Angus Fire
5245/2 01.24